




Water Study 2004

Crystal Analysis conducted by the Hagalis Institute, Germany
Origin of Life - 1st place among 30 contenders
Excerpts from the Hagalis Study



Mains water from Überlingen, 400x

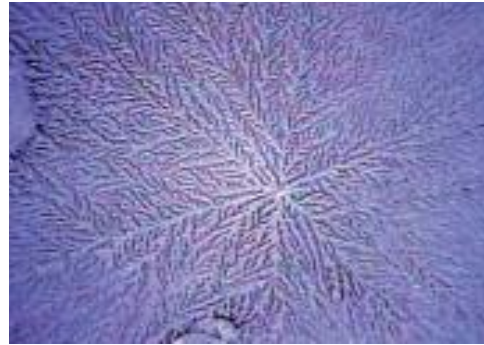

Change in the structure of mains water after treatment with Origin of Life, 400x



Very fine, high grain crystalline structures mean an increased bio-availability of the minerals. At the same time, the technical quality of the water has clearly been improved and the calcification danger reduced accordingly. Petal shaped crystals are present, as are well known in the highest quality of spring water samples.

For more information please call us or look at
<http://www.origin-of-life.eu/>



A stainless steel – countertop filtration system „Easy Change“ A timeless design with leading filter quality



„Easy-Change“

means simply easy to change filter. Optimal filtration system which removes and blocks contaminated information in combination with Origin of Life energizer*



*Origin of Life energizer: (i.e. high energized) energy rich water - with spring water quality - free of particle and pollutants information.

- Quality German workmanship from a leading filter housing manufacturer - certified by the technical inspection authority (TÜV Germany)
- High sanitary standards of proficiency provide by the new „Easy-Change“
- A patent activated carbon filter with wide absorptions pores made from coconut peel
- The 0,1µm micro fiber membrane at the end causes the germ barrier
- **The filter removes:**
 - o germs, bakteria, pesticides, chlorine, rust, organic contaminants,
 - o microorganisms, heavy metals, impaired additives, suspended particles
- Simple installation to existing tap by toggle valve - barred from filter changing defects

* For more information refer to the **water study from 2004** - Origin of Life placed 1st among 30 companies - <http://www.origin-of-life.eu/>



Product specifications and instruction manual

Handling

Immediate use is possible with the preassembled fittings. Simply install and connect to the already existing water tap: the aerator in the tap should be exchange with the toggle valve.



„Easy-Change“ - Completely simple: just a push of a button and a “click”



The changeable filter is sanitary without contaminated hazards - an essential point in optimal sanitation. The filter consists of a head and cartridge which provides for the highest standard of sanitary reliability. Cleaning and disinfection of the inner casing is not necessary as in classical systems. During the replacement of the filter it is not possible for bacteria to reach the internal system. Users no longer come in touch with the used or new filter particles. Assemble defects are practically barred.

The „Easy-Change“ counter top system is a special combination high-tech water filtration system with a timeless design and is highly hand crafted to suite customer appeal.



Filter technology: A new Russian and German technology

Prevention of contact with used filter particles through capsuled filter housing provides optimal hygiene.

The combination of the active carbon filter and the MF-micro fiber membrane provides an optimal removal from all contaminations and pollutants. The raw internal filter material is coconut peel.



Internal filter

Activated carbon bloc 0,8µm Micro membrane / fiber membrane 0,1µm grade of filtration

Technical Data

Adaption: 6,35mm [¼"] PE tube length approx. 1 meter;

Togglevalve M22 inside M24 outside;

Total weight dry: approx. 2,2 kg; Weight internal filter cartridge: 530g;

Maximum water pressure: 6,3bar / 91, 4psi; water temperature: +5°C - +40°C

Measurements without nozzle: approx. diameter of 80 mm, height of 370 mm, base diameter 120 mm

Filter case corpus: 2,0 mm thick satin polished stainless steel tube K240

Base: NIEROLEN® HDPE500;

Outlet: Stainless steel [1.4301];

Capacity window: 3.000-10.000 liter (according to contamination);

Volume of flow: max. 4 to 5 liters / min. approx. 4,0bar (1*);

Internal filter measurement: diameter 78 mm, High 308 mm;

Material white: PP - material blue: POM

(1*) for optimal active carbon block protection the volume of water was limited per use.

Important tip: Use only with cold water (up to 30°C). Do not connect to domestic hot water heaters. After several days without use as well as after every filter change, first allow 10 liters of running water through the system.

In accordance with DIN 1988 a filter change after 6 months with sanitized non chlorinated water is required. Technical changes are subject to alteration.